


ANAVIO

UNIFIED INTERCOM READER

Integrated Access Control Reader and Video Intercom

Combine access control with an AI camera, a 2-way intercom, advanced facial verification technology, and hands-free access to your facilities.

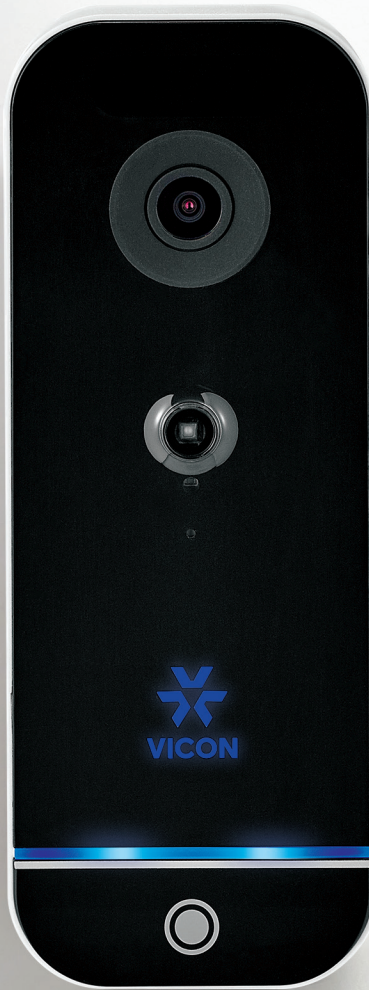

GSA  NDAA  TAA 



MULTIPLE ACCESS METHODS

The reader supports the most advanced facial verification technology, modern smartphone and traditional cards and fobs, with dual credentialing options.



NO BADGE SHARING

Unlike traditional cardkey access, which can't guarantee the user is the actual badge owner, our face verification definitively confirms identity—your face is your key.



ANTI-SPOOFING

Liveness detection can identify attempted presentation attacks, like printed photos, masks, or videos, and denies access accordingly.



2-WAY REMOTE INTERCOM

Be notified about visitors from wherever you are, and communicate with them via the two-way intercom and camera.



TEMPORARY VISITOR ACCESS

Send visitors a web link (via an email or text) that will grant them temporary access to a specific door—no app or separate guest management system required.




BUILT-IN ACCESS PANEL


The built-in access control panel allows you to control electronic door locks, exit buttons, and door contacts without long wiring runs.




THE MOST INTELLIGENT MULTI-FUNCTION READER IN THE INDUSTRY

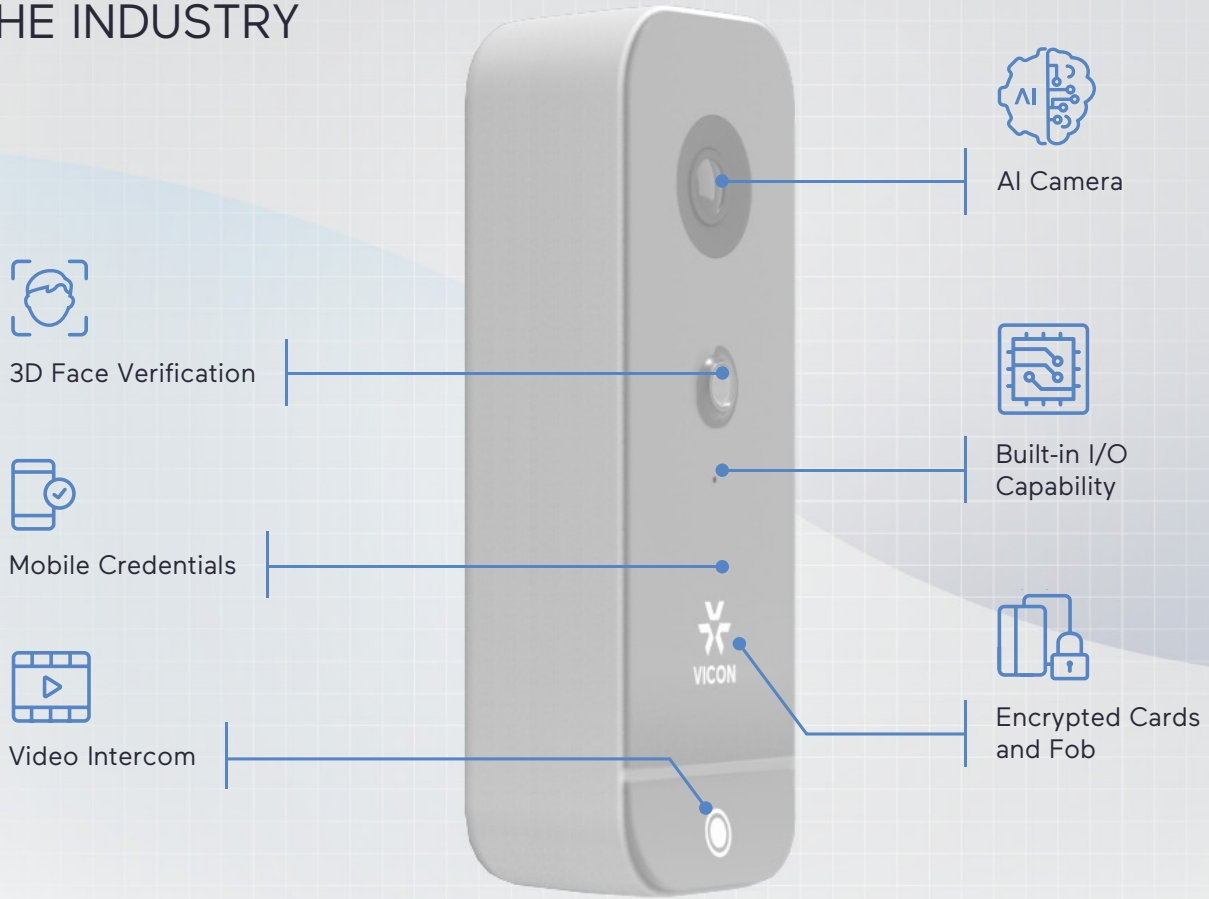

HERE'S HOW IT COMES TOGETHER

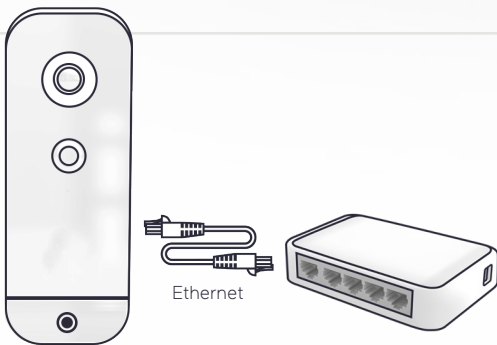

Connect to your door hardware (e.g., electronic locks, door contacts, etc.) and plug reader into a PoE switch to power it up.



Connect the PoE switch to your router so you can access your reader via the cloud.



Your new reader is up and running and you'll see it in your Anavio portal.

SPECIFICATIONS

ELECTRICAL

Input Power: PoE (802.3af)
Power Consumption: 10 W
Processor: Dedicated CV 25

AUTHENTICATION METHODS

3D Face Verification
Card Credentials (MIFARE/DESFire)
Mobile App
Cloud-Key

MECHANICAL

Height: 6.8 in. (173 mm)
Width: 2.7 in. (69 mm)
Depth: 1.5 in. (38 mm)
Weight: 0.7 lb (300 g)

COMMUNICATION INTERFACE

Ethernet 10/100
Bluetooth
Wiegand Input/Output
RS485
2 General Purpose I/Os
1 Dry Contact Relay

SMARTCARD TECHNOLOGY

High Frequency 13.56 MHz
ISO/IEC 14443

ENVIRONMENTAL

Temp: -4° to 122° F (-20° to 50° C)
Weather Rating: IP65
Shock Protection: IK07

VIDEO + AUDIO

Image Sensor: RGBIR
Resolution: 2 MP
Focal Length: 2.85 mm
FOV: 130° (H); 67° (V)
IR: 6.6 ft (2 m); 940 nm
Audio: Built-in mic/speaker with echo and noise cancellation

SECURITY


Fully encrypted communication between reader and cloud software

COMPLIANCE

FCC, FDA, CE, UKCA

I/O CONTROLLER

This intelligent I/O controller ensures secure communication between Anavio's Unified Intercom Reader (UIR) and door strikes, door contacts, and exit button.

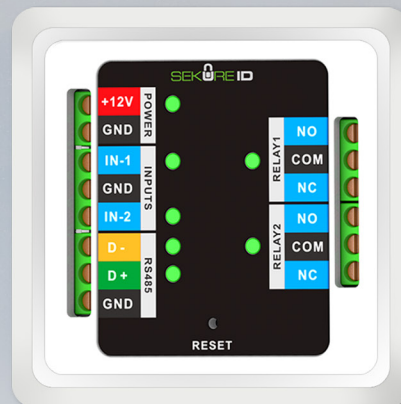

ELECTRICAL

Input Power: 12 VDC
Current: 100 mA

COMMUNICATION INTERFACE

RS485 (COM)
2 Form C Relays
2 TTL Inputs

DIMENSIONS

Height: 1.25 in. (32 mm)
Width: 2.75 in. (70 mm)
Length: 2.75 in. (70 mm)

ORDERING INFORMATION

READER

VA-UIR02A
Unified Intercom Reader

READER CONNECTION LICENSES

VA-RLIC1Y
1-Year Reader License

VA-RLIC3Y
3-Year Reader License

VA-RLIC5Y
5-Year Reader License

ACCESSORIES

VA-SC1K
MIFARE PVC Printable
Smartcard (1 K)

VA-SCK1K
MIFARE Printable Smartcard
Keyfob (1 K)

VA-IOC01
Intelligent I/O box ensures secure
communication between UIR and
door strikes

V-POE-CS2
Combiner/Splitter for co-locating
any two Anavio readers/cameras

Please contact your [Vicon sales representative](#) for more information.



Vicon Data Sheet Number: 8009-7335-00-00

Specifications subject to change without notice.
Vicon and their logos are registered trademarks of Vicon Industries Inc.
Copyright © 2024 Vicon Industries Inc. All rights reserved.

