



V2102B-W313MIR

V2105B-W313MIR

Roughneck Bullet Camera Series




NDA-Compliant GSA ONVIF TAA
S/G/T


Overview

For customers who need to monitor activity in a variety of lighting conditions, from bright light to complete darkness, Vicon's Roughneck® Bullet Camera integrates Smart IR, True WDR, and 2 MP or 5 MP resolution to guarantee superior image quality, regardless of lighting. The camera is protected by a weather-proof (IP67), vandal-resistant (IK08) enclosure, and generates an alert in the event someone attempts to obstruct or move the camera.

Dimension Drawing [in. (mm)]

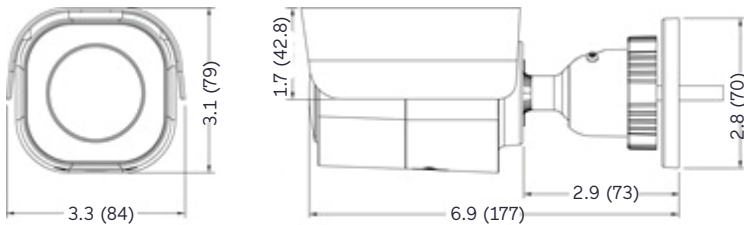

Pigtail Cable:

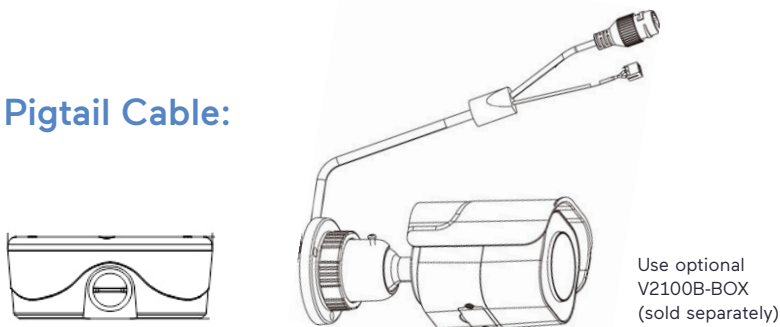

Product at a Glance

- ▶ Choose between 2 MP and 5 MP resolution
- ▶ True WDR ensures bright areas do not appear saturated and dark areas are not too dark
- ▶ Integrated Smart IR provides uniform illumination in total darkness for high-quality video from 98 ft (30m) away
- ▶ Remote zoom and focus lets you zoom in and out remotely with the click of a mouse
- ▶ The camera's bullet design guarantees a watertight installation





Specifications

Model	V2102B-W313MIR	V2105B-W313MIR
Camera		
Image Sensor:	1/2.8-in.	
Max Resolution:	1920 x 1080 (1080p)	2592 x 1944 (5 MP)
Image Settings:	Digital image effects: flip, and mirror and corridor. Configurable brightness, contrast, saturation, hue, sharpness. White balance. Backlight Compensation (BLC). HLC. Gain control. Gamma correction. Electronic shutter speed. Day/night mode. Dynamic Noise Reduction. Motion detection (4 programmable zones). Privacy masking (8 masks). Dynamic ROI. Digital zoom. Event notification.	
Video Content Analytics (VCA):	Motion, Tampering/Defocus. Museum Search.	
Electronic Shutter Speed:	Auto (1/2 ~ 1/10,000 sec), manual	
Day/Night Performance:	True day/night (IR cut filter)	
Wide Dynamic Range (WDR):	True WDR; 120 dB	
Minimum Illumination (@ 30 IRE):	Color: 0.015 lux; BW: 0.01 lux, IR Off; 0 lux, IR On	Color: 0.05 lux; BW: 0.03 lux, IR Off; 0 lux, IR On
IR Distance:	Smart/Adjustable IR. 98 ft (30 m) (850 mm); 16 IR LEDs	
Lenses		
Focal Length:	3.1-10 mm; 3.2X optical zoom	
Max. Aperture:	f/1.4 - f/2.8	
Iris:	DC autoiris	
Zoom/Focus Adjust:	Motorized zoom and focus	
Field of View Horizontal/Vertical/Depth:	34° (tele) - 102° (wide)/20° (tele) - 54° (wide)/40° (tele) - 118° (wide)	32° (tele) - 96° (wide)/24° (tele) - 69° (wide)/40° (tele) - 124° (wide)
Network Video Transmission		
Network:	10/1000Base-T/TX: RJ-45	
Image Compression:	H.264; H.265; M-JPEG	
Resolution:	2 MP: 1920x1080 (1080P), 1280x960/720, 800x600, 640x480 5 MP: 2592x1944/1520, 2048x1536, 1920x1080 (1080P), 1280x960/720, 800x600, 640x480	
Protocol:	ARP, DHCP, DNS, FTP, HTTP, HTTPS, HLS, ICMP, IGMP, IPv4/6, LDAP, NTP, RTSP/RTCP/RTP, RTMP, QoS, SMTP, SNMP v1/2c/3, TCP, TLS/TLS, UDP, UPnP, 802.1X, UPnP, Bonjour, DDNS, PPPoE; ONVIF Profile S/G/T	
Frame Rate:	30/25 fps max	
Streams:	Triple streaming. 2 MP: Single: 2 MP@30fps; Dual: 2 MP@30fps + 2 MP@30fps; Triple: 2 MP@30fps; + 2 MP@30fps + 1280 x 720@30fps 5 MP: Single: 5 MP@30fps; Dual: 5 MP@30fps + 640x480@30fps; Triple: 5 MP@30fps; + 640x480@30fps + 640x480@30fps	
Users:	Live: 10 users	
Web Browser:	Chrome®, Safari®, Firefox®, Microsoft® Edge	
Security:	IP address filtering, HTTPS encrypted data transmission, SSL, IEEE 802.1X, Digest Authentication, Advanced Security	
Mechanical		
Construction:	Camera case: white aluminum. Window: double glass/polycarbonate. Bracket: PC + ABS.	
Camera Angle of Adjustment:	Adjusted using integral wall mount. Mechanical camera adjustment pan/tilt.	
Mounting:	Surface mount, wall or ceiling	
Dimensions:	3.3 in. (84 mm) (W) x 3.1 in. (79 mm) (H) x 6.9 in. (177 mm) (L)	
Weight:	2 lb (0.9 kg)	

Specifications

Electrical	
Input Power:	PoE IEEE 802.3af class 3; 12 VDC ($\pm 10\%$)
Current:	12 VDC: 0.63 A; PoE: 0.16 A
Power Consumption:	IR On: 7.6 W; IR Off: 5.2 W
Controls and Connectors	
Connectors:	Pigtail cable provided; optional backbox required for cabling. Power: 12 VDC: terminal block; PoE/Network: RJ-45 CAT 5; Reset button; Default button; Micro SD card slot for SDHC/SDXC card (128 G max; customer-supplied)
Environmental	
Operating Conditions:	Outdoor rated Temp: -22° to 140° F (-30° to 60° C) Humidity: up to 90%, non-condensing
Approvals:	UL, FCC Class A, CE, IP67, IK08; ONVIF Profile S/T/G, RoHS, BIS
Country of Origin:	Taiwan
Warranty:	5 years

Ordering Information

Model	Description	
V2102B-W313MIR	2 MP; 3.1-10 mm motorized zoom and focus; autoiris	
V2105B-W313MIR	5 MP; 3.1-10 mm motorized zoom and focus; autoiris	
Accessories		
V-24CMB-4	Corner Mount	
V-20B-A-4	Pole Mount	
V2100B-BOX	Backbox Mount; for ease of cabling; compatible with V-24CMB-4 corner mount and V-20B-A-4 pole mount adapter	
V2100B-PLATE	Adapter Plate; allows the V2100B to be mounted on a 4x4 electrical box	

Data Sheet Number: V318-00-08

Vicon Data Sheet Number: 8009-7318-00-08

Specifications subject to change without notice.

Vicon and their logos are registered trademarks of Vicon Industries Inc.

Copyright © 2023 Vicon Industries Inc. All rights reserved.

Chrome is a registered trademark of Google LLC.

Firefox is a registered trademark of Mozilla Corp.

Safari is a registered trademark of Apple Inc.